

# Mobile Wheel / Axle Load Scale

Specific and rapid weight investigation, just there where do you needed it.

- More profitable by burden check
- Raised up the safety
- Avoids fines

- Nearly everywhere applicable
- Easy for portable
- Simplified the data management


Meteor 2010 – XL	Mobile Wheel / Axle Load Scale		
Туре:	Ultra Slim Weighpad		
Material:	Lightweight, high strength aluminium alloy		
Capacity:	10t or 20t each weighpad (500kg min weight required)		
Accuracy:	Static mode: 0.5% - 1% or better		
	<b>Dynamic mode:</b> 3-5% or better up to (5kmh).		
	Note: (Accuracy greatly dependant on site conditions & operator use)		
Rated overload:	120% platform -40° to +70° / Weighing indicator 0° to +40°		
Temp:			

Size of pad: 765mm x 470mm actual weighing area/surface = 715mm x 420mm Clip on mini ramps, which extend the platform on each side by 130mm (Ramp weight = 2.3kg ea). Note: Can be used without ramps.

Weight of pad:	19kg each	Height approx:	18mm
----------------	-----------	----------------	------

Ground level req: <5mm within 0.4m<sup>2</sup>

### Note: Actual weighing surface = 715mm x 420mm

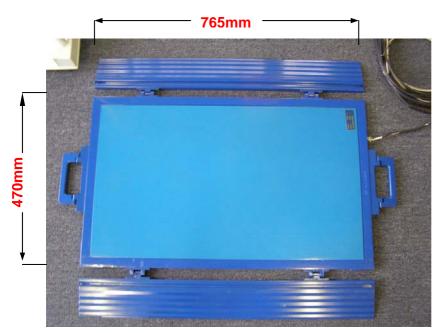



Case Dimensions: 430 x 310 x 150mm (H) Weight: 6.5Kg Powered by 240v plus a self contained re-chargeable battery. Battery life approx 1 week with overnight recharge via 240vVadaptor.

### 1 Set Meteor 2010 – XL

consists of: 2 weighing pads, 4 clip on mini ramps, weighing indicator / controller / printer in hand carry case, measuring cable set, 3 spare paper rolls and 1 ink cartridge.

Article No. METOR.000.010 Article-No. METOR.000.015 Meteor XL 10t wheel load Meteor XL 20t wheel load



## Meteor 2010 – XXL Mobile Wheel / Axle Load Scale

Capacity:	20t or 40t each weighpad (500kg min weight required)				
Туре:	Ultra Slim Weighpad				
Accuracy:	Static mode:	0.5% - 1% or better			
	Dynamic mode:	3-5% or better up to (5kmh).			
	Note: (Accuracy greatly dependant on site conditions & operator use)				
Rated overload:	120%				
Temp:	platform -40 to +70° / weighing indicator 0 to +40°				
Material:	Lightweight, high strength aluminium alloy				
Size of pad:	950mm x 550mm				
actual weighing area/surface = 900mm x 500mm					
Clip on mini ramps, which extend the platform on each side by 130mm					
(Ramp weight = 2.3kg ea). Note: Can be used without ramps.					

Weight of pad:	30Kg / Height approx:	20mm
Ground level req:	<5mm within 0.4m <sup>2</sup>	

### Note: Actual weighing surface = 900mm x 500mm





Case Dimensions: 430 x 310 x 150mm (H) Weight: 6.5Kg Powered by 240v plus a self contained re-chargeable battery. Battery life approx 1 week with overnight recharge via 240V adaptor.


### 1 Set Meteor 2010 - XXL

consists of: 2 weighing pads, 4 clip on mini ramps, weighing indicator / controller / printer in hand carry case, measuring cable set, 3 spare paper rolls and 1 ink cartridge.

Article No. METOR.000.020: Meteor XXL 20t wheel load

Article-No. METOR.000.025: Meteor XXL 40t wheel load

### Pfister Waagen Bilanciai GmbH



Product information Nr. 1269e

12/2011

